


DIP SWITCH

Dip Switch | Dip Switch



DIP SWITCH

Dip switch | Dip switch

100 mA 50 V DC
Non azionato

25 mA 24 V DC
Azionato

Corpo
PBT UL94-V0

Terminali
Bronzo fosforoso
dorato

Temperatura di lavoro
-25°C +70°C

100 mA 50 V DC
Non steady

25 mA 24 V DC
Steady

Body
PBT UL94-V0

Contacts
Phosphor bronze gold
plated

Operating temperature
-25°C +70°C

100 mA 50 V DC
Non actionné

25 mA 24 V DC
Actionné

Corps
PBT UL94-V0



Fils de connexion
Bronze phosphoreux
doré

Température de travail
-25°C +70°C



Codice Code Code	Poli Poles Pôles		Dimensioni "A" Dimensions "A" Dimensions "A"
D6001	1	130	3,84
D6002	2	82	6,08
D6003	3	56	8,92
D6004	4	45	11,16
D6005	5	36	13,70
D6006	6	30	16,24
D6007	7	26	19,08
D6008	8	23	21,32
D6009	9	20	24,16
D6010	10	19	26,40
D6012	12	16	31,48

Dimensioni | Dimensions | Dimensions

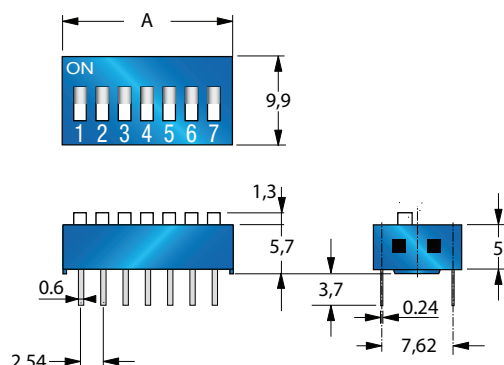

DIP SWITCH

Dip switch | Dip switch

1 A 50 V DC
Non azionato

300 mA 50 V - 1,5 A 10V
Azionato

Corpo
PC UL94-V0

Terminali
Bronzo fosforoso
dorato

Temperatura di lavoro
-25°C +70°C

1 A 50 V DC
Non steady

300 mA 50 V - 1,5 A 10V
Steady

Body
PC UL94-V0

Contacts
Phosphor bronze
gold plated

Operating temperature
-25°C +70°C

1 A 50 V DC
Non actionné

300 mA 50 V - 1,5 A 10V
Actionné


Corps
PC UL94-V0

Fils de connexion
Bronze phosphoreux
doré

Température de travail
-25°C +70°C

Codice Code Code	Poli Poles Pôles		Dimensioni "A" Dimensions "A" Dimensions "A"
D2002	2	62	7,4
D2003	3	45	10,0
D2004	4	36	12,6
D2006	6	26	17,8
D2008	8	20	22,9
D2010	10	17	28,0

Dimensioni | Dimensions | Dimensions

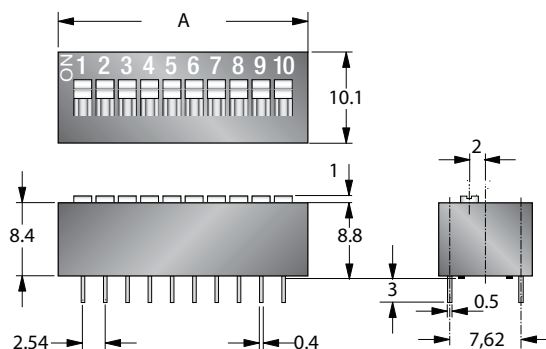

Fino a esaurimento scorte
To be discontinued
Jusqu'à épuisement des stocks