


UL 标准/UL Standard:	
额定电压/电流/Rated Voltage(V)/Current(A)	600
IEC 标准/IEC Standard:	
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/2
额定电压/电流/Rated Voltage(V)/Current(A)	450/32
工频耐压/Withstanding voltage(V/1Min)	AC2500
线数范围/Poles	N=01P
线径范围(硬线和软线)/Wire Range(rigid and	24~12/ 0.2~4.0
线数范围/Poles	N=01P
剥线长度/Stripping length(mm)	12~13
使用温度范围/Operating temperature(°C)	-40~+85(IEC)

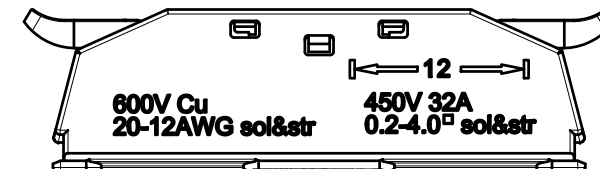

DEGSON  **DGBSC-SG02/4-01P**

5	Current carrier	Copper	Sn Plated
4	Spring	Stainless steel	/
3	Button	PA66+GF	UL94V-0
2	Cover	PC	UL94V-2
1	Housing	PC	UL94V-2
ITEM	NAME OF PART	MATERIAL	NOTES

 DEGSON		MATERIAL: /		SURFACE/COLOR: /	
		MAT NO./REV: - / 00		MAT STATUS: 设计放行	
APPD: 蓝贵凡	2023.06.10	NAME DGBSC-SG02/4-01P (1Y-00A&ZH)			
CHKD: 曹利彬	2023.06.10				
DRFT: 曹利彬	2023.06.10				
 A4		DRAWING NO. 200199127		TYPE CUSTOMER DRAWING	
		DRAWING STATUS 已发布		SCALE 2:1	SHEET 1/1

00		/	曹利彬	2023.06.10
REV	ECN	DESCRIPTION	DRFT	DATE