

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除单独许可或授权外, 否则禁止转让、复制、利用、交还本文件内容。侵犯者将承担法律责任。侵犯者将承担法律责任。 实用新型和外观设计专利的所有权利。

FOR-1754 Rev.1.2

2





3

4

5

6

未注公差/General tolerances(mm)													
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2'

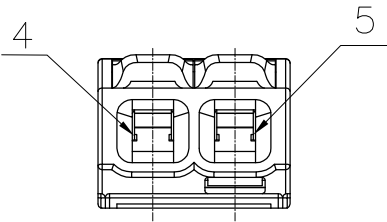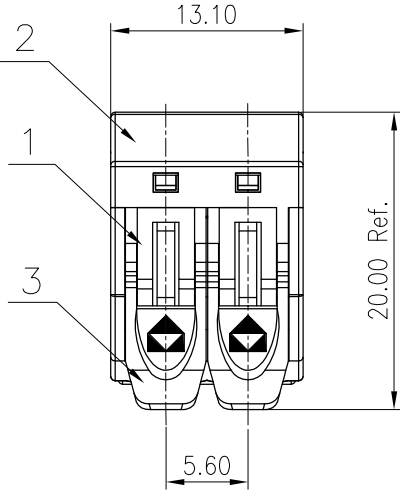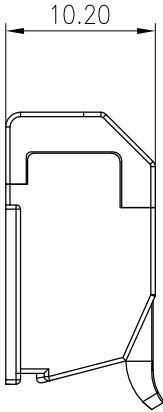

5	Current carrier	Copper	Sn Plated
4	Spring	Stainless steel	/
3	Button	PA66+GF	UL94V-0
2	Cover	PC	UL94V-2
1	Housing	PC	UL94V-2
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:			
额定电压/Rated Voltage(V)		600	
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		Ⅲ/3	Ⅲ/2 Ⅱ/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	450/32
工频耐压/Withstanding voltage(V/1Min)		/	AC2500
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)		24~12/0.2~4.0	
剥线长度/Stripping length(mm)		12	
使用温度范围/Operating temperature(°C)		-40~+85 (IEC)	
符合RoHS环保要求/Conform to RoHS		Yes	
Mark"DGBSC-SG01/4-02P": 600V Cu 24-12AWG_sol&str			

MATERIAL:			SURFACE:		
MAT NO.:		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
STATUS: /					
APPD: /					
CHKD: /					
DRFT: /		NAME: DGBSC-SG01/4-02P(1Y-00AH)			
DRAWING NO.: /			REV		DO
	SIZE: A4		TYPE: CUSTOMER DRAWING		SCALE: 2:1
			SHEET		1/1

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

1 2 3 4 5 6